


Taco Cartridge Circulators

Taco Cartridge Circulators are rugged, versatile, quick and easy to install. With their self-lubricating design and no mechanical seal, they provide unmatched reliability that makes them maintenance free. Every Taco circulator features a field-replaceable cartridge that contains all the moving parts. Replacing the cartridge rebuilds the circulator. Field service could not be faster or simpler to perform.

Taco IFC Cartridge Circulators feature an Integral Flow Check (IFC) that eliminates the additional installation costs that go along with separate in-line flow checks, improves system performance and further reduces maintenance.

Taco Cartridge Circulators deliver excellent service at fluid temperatures from 40°F (4°C) to 240°F (115°C) and up to 125 PSI maximum working pressure. Their wide variety of configurations, flange orientation, mounting and other options, materials and capabilities provide you with great performance in a broad range of applications

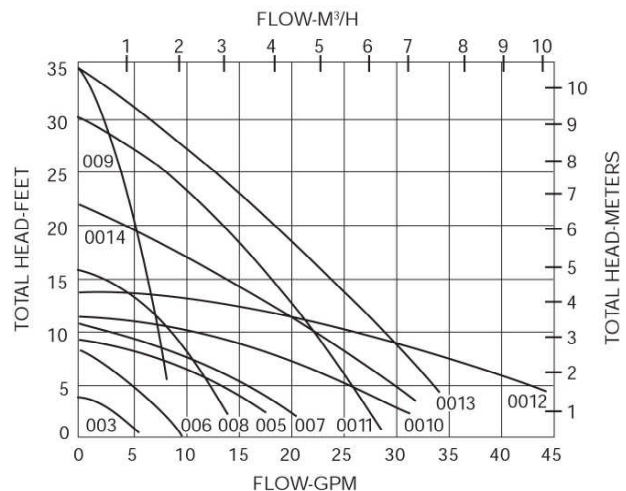

Features:

- Standard High-Capacity Output
- Direct Drive, Low Power Consumption
- Universal Flange-to-Flange Dimension - Ideal for retrofits
- Quiet, Efficient Operation
- Unique Replaceable Cartridge Design - Field serviceable
- Unmatched Reliability - Maintenance Free
- Self Lubricating
- No Mechanical Seal
- Exclusive Dirt Barrier - Keeps dirty system water out of bearing chamber
- Ceramic Shaft - For longer life and excellent wear resistance
- UL Listed, Impedance Protected Motor
- Anti-Condensate Baffle (ACB) to Protect Motor Windings (Models 0011, 0012, 0013)
- Optional Integral Flow Check Valve (IFC)[™]
- Optional Priority Zoning Relay
- Optional Plumb n' Plug Pre-Wired Timer Control